




Impasto

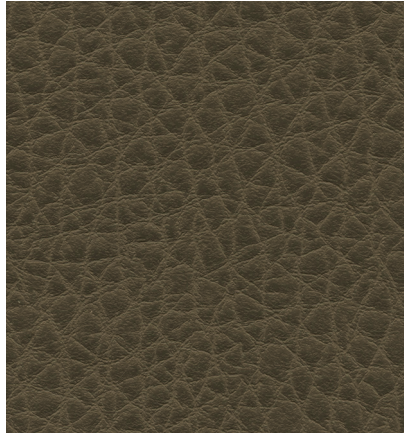

733-58843 Thunder



733-60973 Almond Milk



733-33903 Amberglow



733-72373 Genesis



733-35143 Snickerdoodle




733-33343 Tiger Eye




733-43403 Bay Leaf




733-60943 Arctic Fox




733-33853 Caribou



733-34863 Pumpnickel



733-26053 Nocturne Blue




733-60983 Black Spinel

Lino



740-65783 Wigwam




740-34513 Haystack




740-82593 Carrot




740-43323 Jadite




740-58733 Coin



740-34463 Cider



740-82603 Adobe Red



740-25143 Bosporous




740-50193 Lead




740-33793 Hearth



740-13943 Plum Wine



740-25123 Independence



740-34063 Trunk


Montage




744-33373 Alpaca




744-35593 String




744-35553 Old Penny




744-43253 Sorrel




744-56303 Silver Ash




744-35563 Cord




744-14223 Firebrick




744-60873 Gris




744-50393 Horseradish




744-35673 Cinnamon Toast



744-14233 Red Rock



744-25063 Indigo Batik



744-60883 Cast Iron

Collection	Composition	Weight / Thickness	Abrasion
Impasto Grade 3	Polycarbonate Blended Surface 65% Polyester, 35% Cotton Backing	12.53 oz. per sq. yard Approx. 0.95 mm	ASTM D4157 / 200,000 DR Wyzenbeek
Montage Grade 3	Polycarbonate Blended Surface 65% Polyester, 35% Cotton Backing	12.53 oz. per sq. yard Approx. 0.95 mm	ASTM D4157 / 200,000 DR Wyzenbeek
Lino Grade 3	Polycarbonate Blended Surface 65% Polyester, 35% Cotton Backing	12.53 oz. per sq. yard Approx. 0.95 mm	ASTM D4157 / 200,000 DR Wyzenbeek
Width:	54"		
Hydrolysis:	10 Weeks ASTM D3690 SECT. 6.11 (Hydrolytic Stability) / ISO 1419 Method C (Accelerated Ageing)		
F/R Rating:	ASTM E84 (adhered) - Class A CA TB 117 - Pass FMVSS 302 & 95/28 ANNEX IV - Pass NFPA 260 - Class 1 UFAC - Class 1	Can be treated to meet FAR specifications. These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions BS 5852 Source 0, 1 & 5 (Cig, Match and Crib 5), BS EN 1021 Part 1 & 2 (Cig & Match). (Montage & Lino Only)	
Adhesion of Coating:	ASTM D751		
Tear Strength:	ASTM D2261		
Breaking Strength:	ASTM D5034		
Tensile Strength:	BS EN ISO 1421		
Colorfastness to Crocking:	AATCC 8, Grade 4-5 Wet & Dry		
Colorfastness to Light:	AATCC 16.3, 200 Hours, Grade 4 ISO 105 B02, Grade 6		

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

Grade is based on the February 14, 2022 price list

Indiana Furniture

1224 Mill Street
Jasper, IN 47546
T 800-422-5727 | F 812-482-9035
www.indianafurniture.com

Indiana[®]
FURNITURE
1/22

ultrafabricsinc.com
Ultrafabrics[®] and logo, UF Select[®] are registered trademarks
of Ultrafabrics Inc. Made in Mexico.

